


PERFECT FIT NEXT GENERATION SYSTEM

PLEATED BLIND WITH OPERATING HANDLE


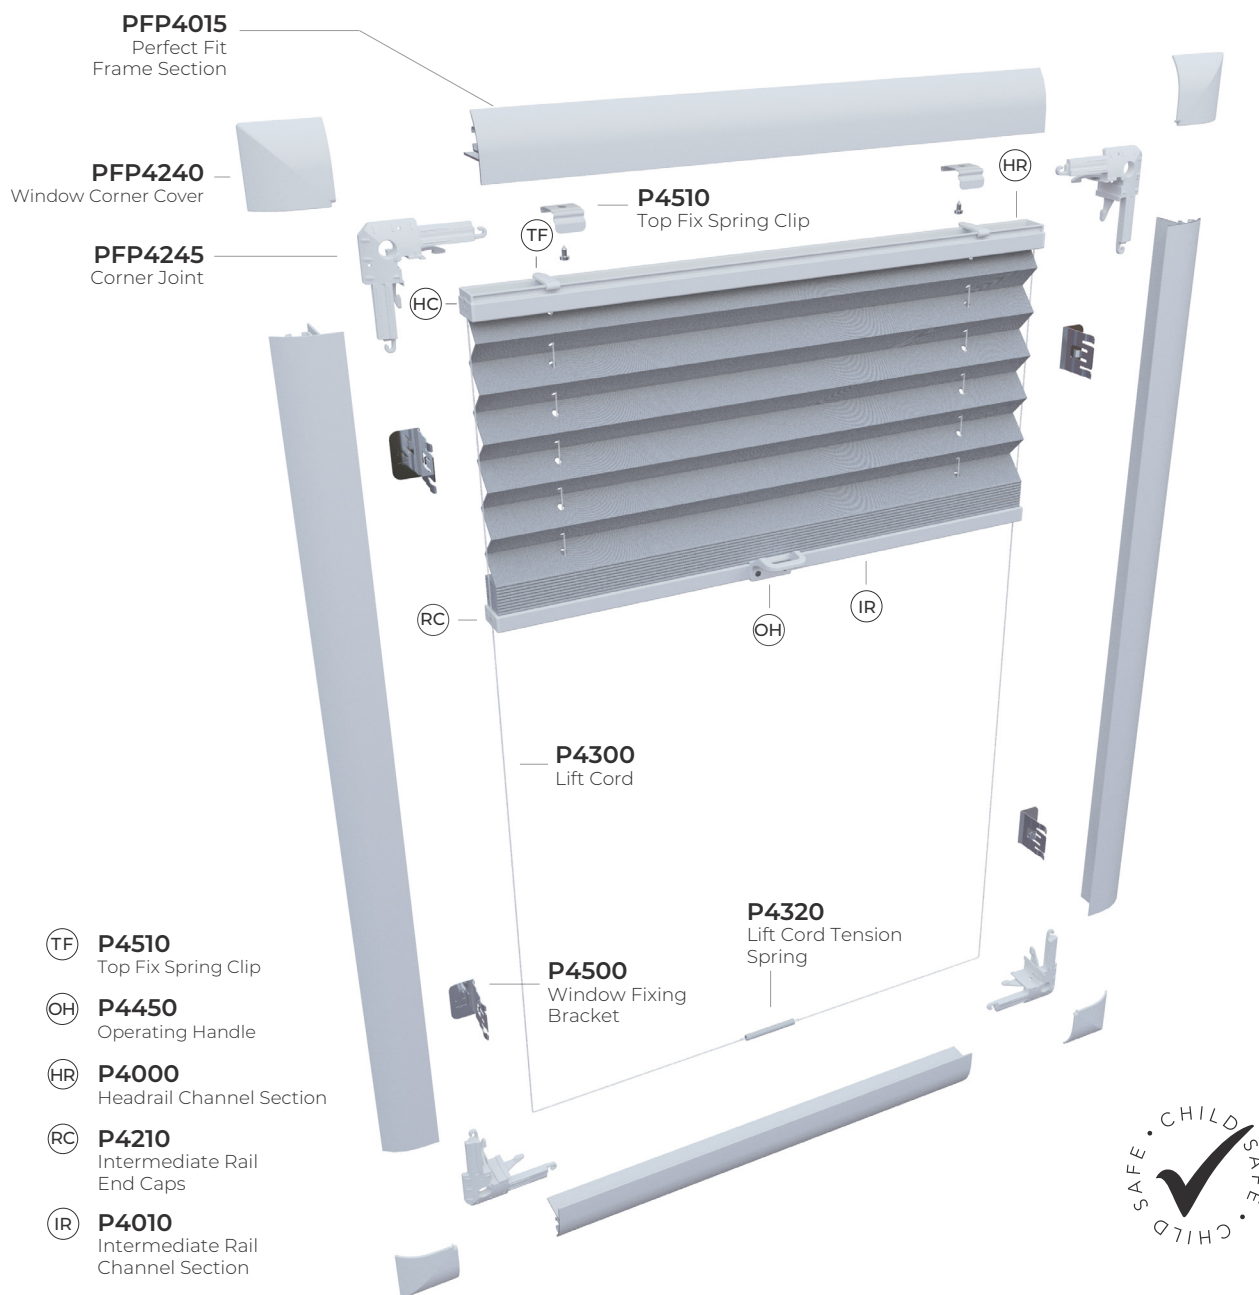


PERFECT FIT NEXT GENERATION PLEATED SYSTEM


- Designed and manufactured in the UK, all Louvolite systems are 10 year life cycle tested to ensure long lasting performance.
- The blind is housed within a neat frame that clicks into uPVC windows and doors and moves with them when they are open, tilted or closed.
- No drilling or screwing needed for installation, the frames just click on using the window fixing brackets and can easily be removed for cleaning.
- Reduces the gaps and light strike at the edge of the blind.
- 18, 20, 22, 24, 26, 28, 30, 32 and 38 brackets to suit most window bead depths.
- The cord tensioning system keeps the blind located within the side channel and off the window.
- Manufactured using high quality engineering grade polymer and aluminium.
- Features a manual operating handle and detached 2m operating wand with twist lock.
- Can be motorised using Louvolite One Touch® Cellular motor P4600.
- For blinds up to 1.4m wide.

PERFECT FIT NEXT GENERATION PLEATED

Perfect Fit Next Generation Cellular PFP4015 Frame Section




Perfect Fit Next Generation P4000 Channel Section, Headrail



MAX BLIND SIZE

FEATURES	
Blind Width	Max 1.4m
Weight Capacity	2lb

Perfect Fit Next Generation Cellular PFP4240 Window Corner Cover

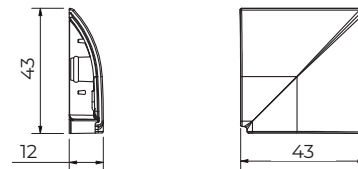

HARDWARE SPECIFICATION

Perfect Fit Next Generation Pleated System

Our pleated blinds are manufactured using the Louvolite pleated blind mechanism with specifically designed 20mm headrail and intermediate rails.

The fabrics are secured into the head & intermediate rails with aluminium slatting.

The end caps are moulded using UV stabilised Nylon 6 with brass eyelets to ensure minimum wear on the parts under use.

All fixing brackets for the Perfect Fit Next Generation system are manufactured from hardened spring

steel, these are zinc plated protection and can be powder coated in the standard colours to compliment the Perfect Fit Next Generation frame profile.

Performance

To ensure a positive performance, all Louvolite Perfect Fit systems are designed and manufactured in the UK using prime quality plastic and high grade spring steels.

10 year life cycle testing is done to ensure long lasting performance.

The Perfect Fit frame clips into position using our patented spring brackets that come in various sizes

to accommodate the window and door systems available within the market.

Operation

Perfect Fit systems are 'Safe by design' and comply with BS EN13120.

Maintenance

All of the Perfect Fit pleated blind system components are manufactured using aluminium, treated steel and plastic. They do not present any corrosion problems in normal environments. The system has been designed for a smooth operation, together with a rigidity to prolong the window blind's working life.

Your Louvolite Distributor



CI/SfB 1976 reference by SfB Agency			
(76.7)	X		