SUNWOD


FAUXWOOD



SPECIFICATION

Sunwood® Fauxwood is a range of high quality PVC Venetians which emulate a sophisticated wood grain or a contemporary smooth finish which makes it the perfect solution for areas of high moisture such as bathrooms or kitchens.

SUNWOOD® FAUXWOOD VENETIAN BLIND - EXPLODED VIEW

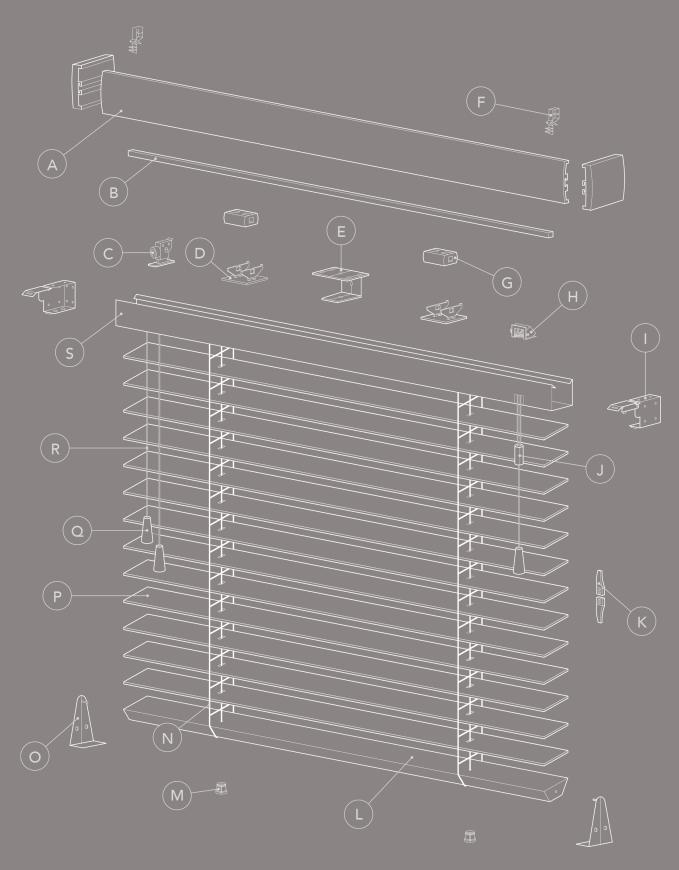

- Valance Tilt Rod Tilter Tape Roll Support Center Support Bracket Valance Clip Tape Roll A B C D E

- H Cord Lock
 I End Bracket
 J Cord Condenser
 K Two-Piece Cord Cleat
 L Bottom Bar
- Bottom Bar Button Ladder Cord
- O Hold Down BracketP SlatQ TasselR CordS Headrail



Product Information Fact Sheet

SLAT WIDTHS	TAPE WIDTHS AVAILABLE
35mm	25mm
50mm	25mm or 38mm

25mm tape width is the standard default for 50mm blinds. Alternative tape colours and 38mm tapes are available on request.

FAUXWOOD COLOUR	SLAT SIZE	DEFAULT TAPE COLOUR
Abyss**	50mm	Static
Amber*	35mm & 50mm	Toffee
Arctic Oak*	50mm	Chalk
Chroma**	50mm	Jet
Desert Oak*	35mm & 50mm	Hessian
Linara	35mm & 50mm	Barley
Linara Fine Grain	35mm & 50mm	Barley
Lunar Oak*	50mm	Lunar
Orion	35mm & 50mm	Gallant
Orion Fine Grain	35mm & 50mm	Gallant
Mirage	35mm & 50mm	Vanilla
Mirage Fine Grain	35mm & 50mm	Vanilla
Mission	35mm & 50mm	Lunar
Mission Fine Grain	35mm & 50mm	Lunar
Scandi Oak*	50mm	Dove
Serene	35mm & 50mm	Cotton
Serene Fine Grain	35mm & 50mm	Cotton
True	35mm & 50mm	Chalk
True Fine Grain	35mm & 50mm	Chalk

^{*} only available in fine grain finish

Due to the dark matt colour finish on Chroma and Abyss slats light scratches may be visible from 1mtr.

Colour Coordination

- · All parts of the blind are colour coordinated.
- · The headrail, bottom bar buttons and cord condenser are colour co-ordinated PVC.
- · Toggles are all colour matched wood.
- Cord and ladder braid are colour coordinated to slats.

PLEASE NOTE: Unlike natural wood blinds, Sunwood fauxwood blinds can withstand environments with extreme humidity and moisture levels. Such conditions would result in warpage and twisting of the salts on a real wood product. Faux wood blind is therefore more suitable for bathrooms and kitchens. Please note Sunwood fauxwood blinds require some degree of ventilation to prevent excessive heat build up between the blind and the window. This may occur on exceptionally hot days particularity on the result is a loss of rigidity to the slats causing them to twist / deform permanently. It is therefore recommended that the slats aren't fully tilted/ closed and allow some airflow through the window space. A secondary window covering (E.g. a closed curtain) over a Sunwood Fauxwood blind in these situations is therefore not recommended as this will result in excessive heat build-up. Sunwood Fauxwood blinds comply with FR standards.

Dimensions of Fauxwood Headrails

35MM	42mm height x 42mm depth
50MM	42mm height x 59mm depth

Wholesale boxblinds are supplied in 1300mm drop

1300MM -THIS CAN BE LENGTHENED TO:

3000mm on widths 350mm-1400mm

2400mm on widths 1500mm-2600mm

^{**} only available in flat finish

Minimum & Maximum Widths & Drops

MINIMUM WIDTH	290mm
MINIMUM DROP	150mm
MAXIMUM WIDTH	2600mm
MAXIMUM DROP	3000mm

Blinds over 1400mm wide are restricted to a maximum drop of 2400mm

Number of ladders Per blind


35MM SLATS		
WIDTH	NO. OF LADDERS	
350mm-600mm	2	
601mm-900mm	3	
901mm-1300mm	4	
1301mm-1500mm	5	
1501mm-1800mm	6	
1801mm-2100mm	7	
2101mm-2400mm	8	
2401mm-2600mm	9	


50MM SLATS			
WIDTH	NO. OF LADDERS		
350mm-600mm	2		
601mm-900mm	3		
901mm-1300mm	4		
1301mm-1500mm	5		
1501mm-1800mm	6		
1801mm-2100mm	7		
2101mm-2400mm	8		
2401mm-2600mm	9		

(Alternative box size may be used to cover OOS, at management discretion)


Slat alignment is available on Sunwood Fauxwood and Sunwood Fauxwood with tapes. Please state at point of order.


35mm Fauxwood Headrail Punch Positions:

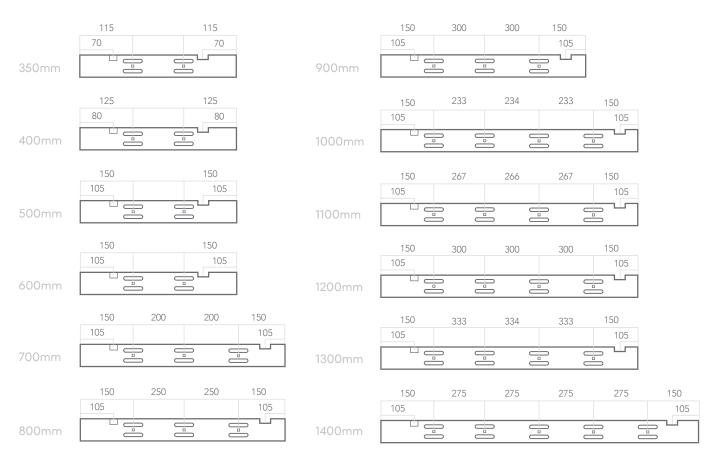

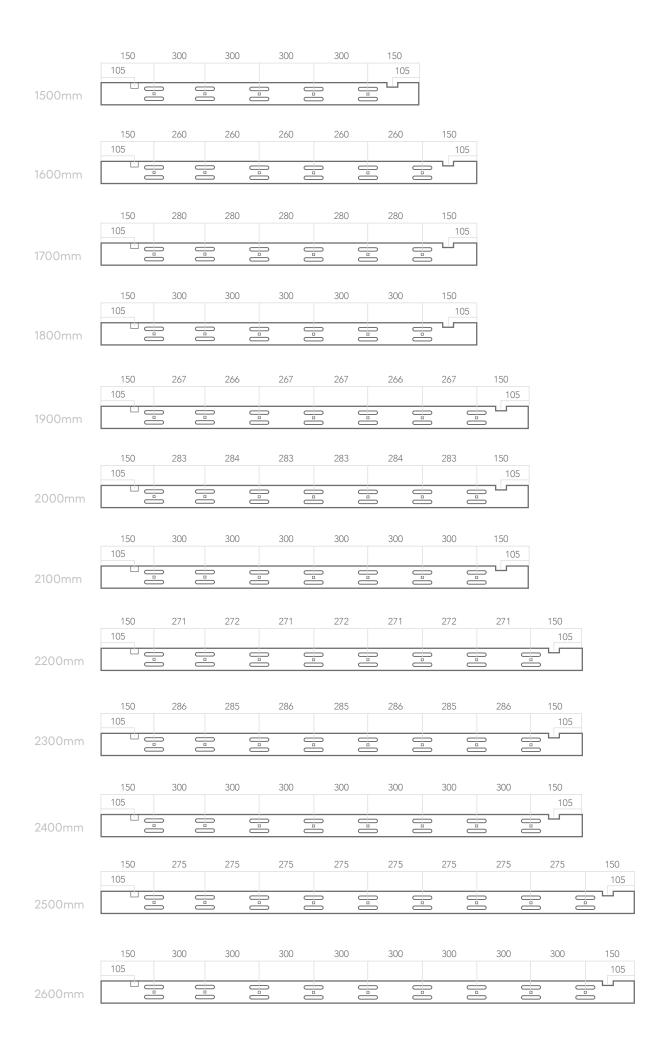

50mm Fauxwood Headrail Punch Positions:

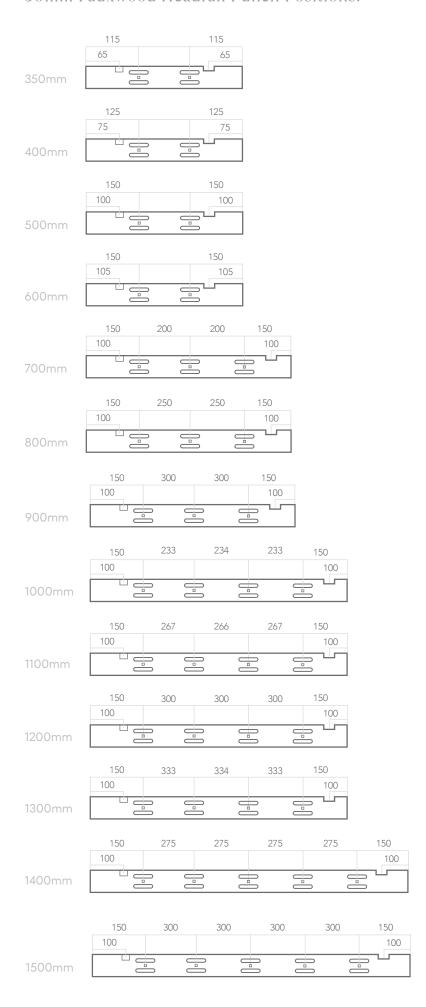

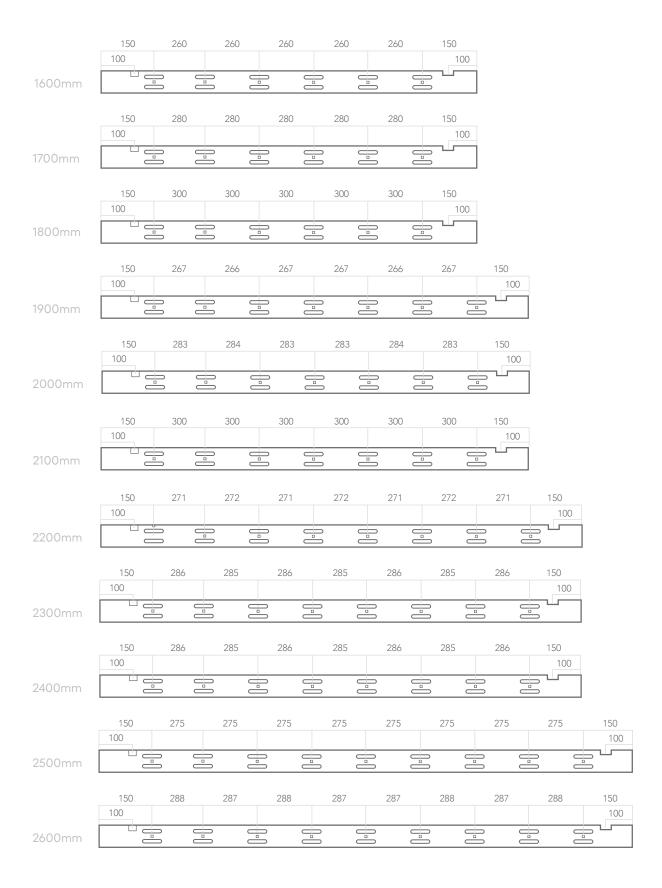

Control Options

- · Standard control only.
- · Raise on the right, tilt on the left.

Accessories

Ladders

Ladders are colour matched to the slats:

35MM	37mm height x 30mm depth
50MM	54mm height x 44mm depth

Tapes

24 tape options are available:



17

Herringbone Weave tapes, available in 2 sizes; 25mm and 38mm.



7

Flatweave tapes available in 38mm only.

Herringbone Weave tapes are the standard tape default:

- 25mm tape for 35mm slat
- · 25mm tape for 50mm slat

Each Fauxwood colour has a Decora recommended tape option which co-ordinates with the slat colour. Customers can choose an alternative tape colour or tape size. (38mm flatweave tapes are an additional charge.)

Tapes are secured to the bottom of the bottom bar using complimenting tape pins.

If same number of tapes required on multiple blinds, please state at point of order.

When ordering for bay windows please state requirement for same box size at point of order if required. Slat alignment is available on Sunwood Fauxwood and Sunwood Fauxwood with tapes. Please state at point of order.

Valance

- D-shaped valance.
- · Valance clips are attached to head rail.
- Due to weight of PVC valance, dual locks are not used.
- · Fine Grain blinds are finished with an Fine Grain valance.



Valance Clip

Valance Returns/Pelmets

PLAIN FINISH	Default. Valance will be 12mm longer than the headrail of the blind.
SINGLE RETURN	Supplied with one mitred return. Internal measurement 13mm. External measurement 21mm.
DOUBLE RETURN	Supplied with two mitred returns. Internal measurement 14mm. External measurement 30mm.
UNCUT	Valance will be left uncut and will be 35mm longer than the width of the Box Blind. One end of the valance will be mitred and one will be straight.
SPECIFIED	If a customer requests for a valance to be a specific length there will be no additional charge provided the valance is no longer than the Box Blind width + 35mm. Any valance that is longer than this cannot be made from

the valance supplied with the blind and will be charged as a valance extra.

Bottom Bar

- Colour Co-ordinated trapezoid.
- · Bottom bar is not embossed.
- Bottom bar is solid PVC.
- 35mm Bottom Bar size: 35mm depth x 13mm height
- 50mm Bottom Bar size: 50mm depth x 13mm height
- Bottom Bar buttons have a pulley wheel; this is used for wider blinds (boxed blinds size: 1401mm wide up). This pulley wheel assists the user making it easier to raise wider blinds.

Slats

· All slats are provided with a 2.8mm thickness.

Tassels

- Tassels will be colour matched wood as standard.
- The raise control will have 1 x large tassel and the tilt control will have 2 x small tassels
- Alternative metal cylinder tassels available with surcharge on request.
 Note: Cylinder tassel one size only.

Cylinder Tassel



Brackets

As standard all Fauxwood Blinds are supplied with 2 box brackets.

These brackets can be fixed in a number of ways;

TOP FIX	Bracket is screwed on to the top of the window recess	
END FIX	Bracket is screwed on to the side of the window recess	
FACE FIX	Bracket is screwed on to the front of the window frame	

Blinds with 3 or more ladders will have a centre support bracket. This will depend on the width.

	_
3 and 4 ladders	1 x centre support bracket
5 ladders	2 x centre support brackets
6 and 7 ladders	3 x centre support brackets
8 and 9 ladders	4 x centre support brackets



Box Brackets

Centre Support Bracket

Alternative Brackets

Alternative brackets are also available. These are called Swivel brackets shown on the right. They are also available as an extension bracket. These are available for both 35mm and 50mm.

The extension swivel brackets will extend the Sunwood® Fauxwood blind out from the window.







Extension Swivel Bracket

Dimensions

вох	35mm	50mm deep x 47mm high	
BRACKET	50mm	65mm deep x 47mm high	
SWIVEL	35mm	50mm deep	
BRACKET	50mm	65mm deep	
EXTENSION SWIVEL BRACKET	35mm will extend blind by 40mm	Total size is 87mm	
	50mm will extend the blind by 45mm	Total size is 110mm	

Hold Down Brackets

Hold down brackets are used to attach the bottom of the blind to a window or door to prevent it from swinging to and fro. There is a small hole on either end of the bottom bar. The hold down bracket is attached to the door with two screws then the tips of the brackets are inserted to the holes on the bottom bar.



Hold Down Bracket


Stack Height

The stacking height refers to the measurement from top to bottom when the blind is fully pulled up. These stacking heights should be treated as advice only. There is a slight variance in the slat thickness and in how the slats pack with the ladder therefore each individual blind will be different.

BLIND DROP (MM)	35MM SLAT STACK HEIGHT (MM)	50MM SLAT STACK HEIGHT (MM)
500	115	105
750	145	130
1000	170	145
1250	195	170
1500	220	190
1750	245	210
2000	270	230
2250	300	250
2500	325	270
2750	350	290
3000	375	310

Chroma & Abyss Quality Reference

Due to the composition and manufacturing process to obtain the PVC plus colours, Abyss and Chroma, the below photos can be used as a reference as to what is deemed acceptable quality and finish of the slats. Please note blinds should be checked 1 metre from the blind.

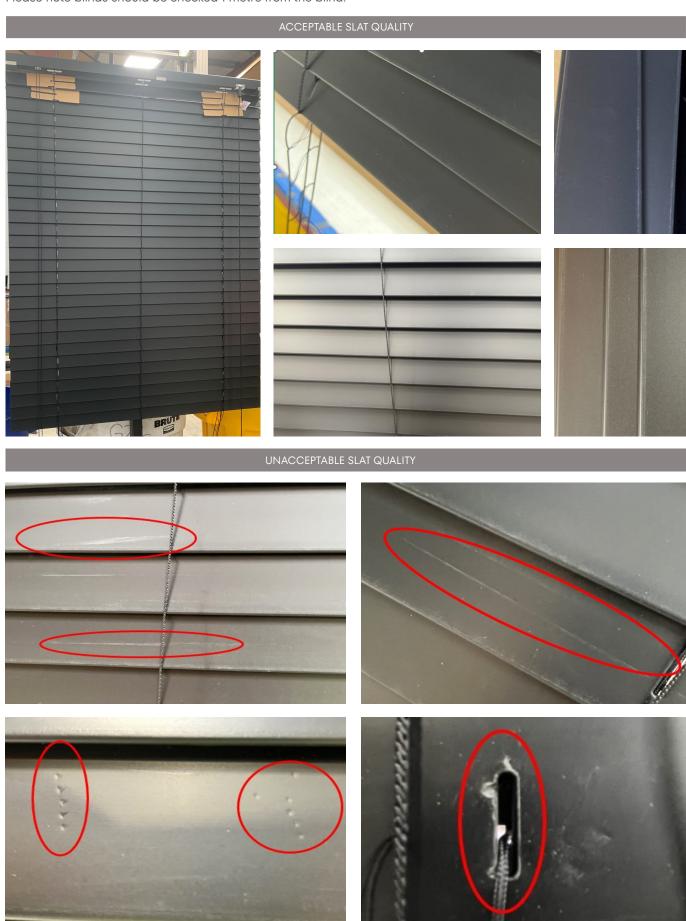

Child Safety

All Sunwood® Fauxwood blinds come with a colour co-ordinated cord condenser and a two-part safety cleat.

The cord condenser is designed to consolidate the pull cords into one string and also to break-away, stopping any loops from forming. The safety cleat is used to wrap the cord around to keep out of children's reach.



Closed

Open

Тор

Bottom



Two-part safety cleat



Cord wrapped in a figure of eight motion

Cord Lengths and Installation Heights

- If the installation height is known the distance from the floor to the bottom of the pull cords shall be at least 1675mm, to allow for the 175mm extension of the tilt cords in the closed position.
- If the installation height is not known and the drop of the blind is less than 2.5m, due to the tilt cords extending by 175mm, the maximum cord length allowed is 825mm.
- If the installation height is not known and the drop of the blind is 2.5m or greater, then the cords shall be less than the drop of the blind minus 1675mm.
- Please note, blinds will be manufactured with their default control length provided that this complies
 with the Child Safety regulations. When large installation heights are provided, the customer must
 request extended control lengths if required.
- The standard control length on Sunwood® Fauxwood are 2/3 the drop of the blind.
- If the control length is not within the child safety rules it will be reduced to the max length allowed by child safety.

All blinds are supplied with compliant warning stickers and warning tags.

Motorisation

Sunwood Fauxwood venetian blinds can be motorised to offer ultimate convenience of light control and privacy in the home. At the touch of a button you can tilt your blinds, especially convenient for blinds in hard to reach places.

T50 RTS

A radio controlled battery powered motor suitable for all sizes of Sunwood blinds enabling convenient control of the tilt of your blind.

Voltage	12V DC
Power	9V DC – 14V DC
Torque	1 Nm
Speed	10 rpm
Radio Freq	433,42 MHz
Width	390mm – 2600mm
Drop	150mm – 3000mm
Headrail	PVC Headrail (Metal inserts on blinds over 400mm wide)
Control	Remote control, wall switch or Somfy TaHoma smart boxes